






HYDRAULIC DIAGRAM

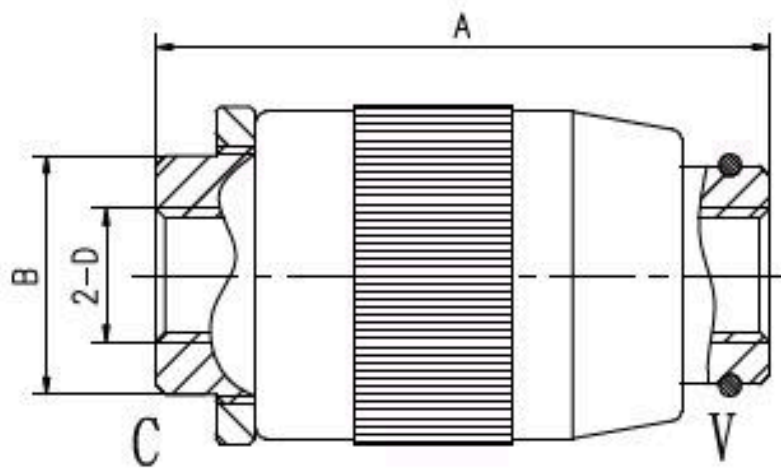

C<->V

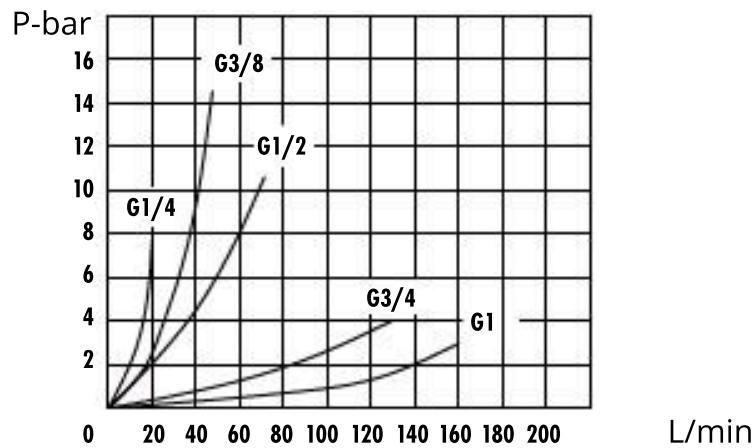


/TYPE	D	(L/min)	(bar)	A	B
VRB-G1/4	G1/4	12	320	62	21
VRB-G3/8	G3/8	30	320	78	26
VRB-G1/2	G1/2	50	320	80	30
VRB-G3/4	G3/4	85	280	100	36
VRB-G1	G1	120	250	118	41

D

NOTE: D Can be designed according to customer requirements






HYDRAULIC DIAGRAM



C->V

V->C

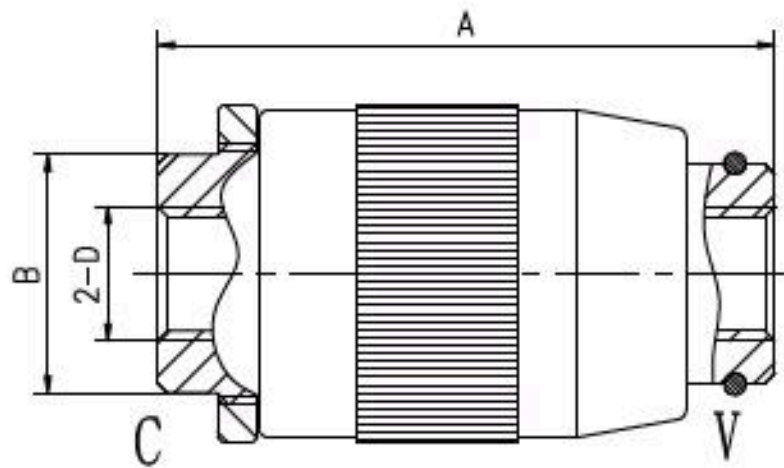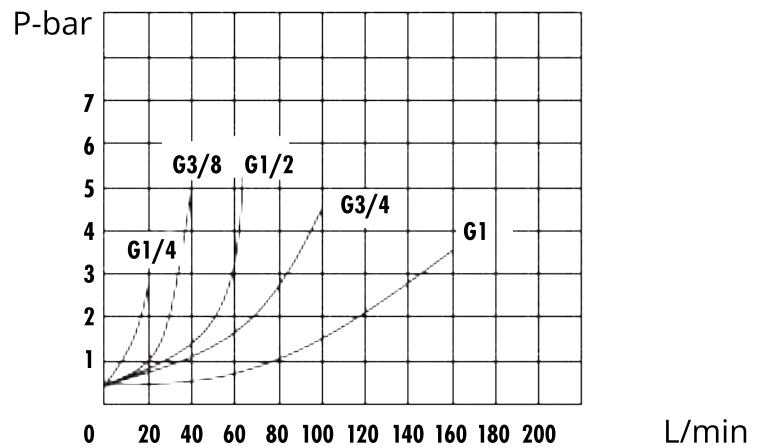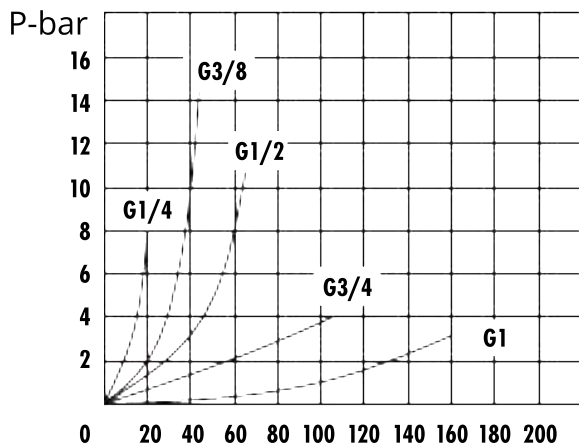

/TYPE	D	(L/min)	(bar)	A	B	(cracking pressure)(bar)
VRU-G1/4	G1/4	12	320	62	21	0.5
VRU-G3/8	G3/8	30	320	78	26	0.5
VRU-G1/2	G1/2	50	320	80	30	0.5
VRU-G3/4	G3/4	85	280	100	36	0.5
VRU-G1	G1	150	250	118	41	0.5

D

NOTE: Can be designed according to customer requirements